



| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

About it

A HIGH QUALITY PRODUCT

For Speedpack a wire that is particularly suitable for automatised welding systems has been studied. Rigorously selected raw materials have been chosen for the production of Speedpack. The copper is done in specially prepared baths that are continuously monitored and tested and that are totally free from impurities, dust and other atmospheric agents; this in order to guarantee the maximum cleanliness of the wire. Strict checks on diameter and CAST ensure perfect uncoiling of the wire.

EASY TO MOVE AND SIMPLE TO STORE

The size of the drum makes for easy movement and simple storage. The drum can be moved in the normal way with the pallet forklift and can also be transported easily and in complete safety using special belts made for this purpose (see accessories).

ENVIRONMENT FRIENDLY AND EASILY DISPOSED OF

Speedpack's packaging is made from completely recyclable materials and is therefore 100% ecological. The reduced cardboard content in the Speedpack drums compared to others allows simple and quick disposal.

MAXIMUM RAPIDITY AND EXTREME PRACTICALITY

Thanks to the special system patented by ISAF the product is ready for use after following a few simple instructions:

- tear off the tab on the side (1);
- take off the knob that serves to block the wire (2);
- tear off the tab on the lid (3);
- thread the wire into the wire entry slot (4);
- hook the wire entry slot onto the lid by turning it (5);

All procedures described above can be made without opening the container.

Speed Pack is delivered with four guarantee seals. The four seals guarantee the product integrity. The drum has a special graduated window (kg/lbs) that allows you to check how much wire remains towards the bottom of the drum.

MAXIMUM PROTECTION

The box and the carton cylinder together with a sachet of Silica Gel guarantee perfect protection against oxidation.

AVAILABILITY OF WIRES


In addition to carbon steel wire copper coated, we also supply copper free, bronzed coated and other low alloyed wires. Contact us!





| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

Plus

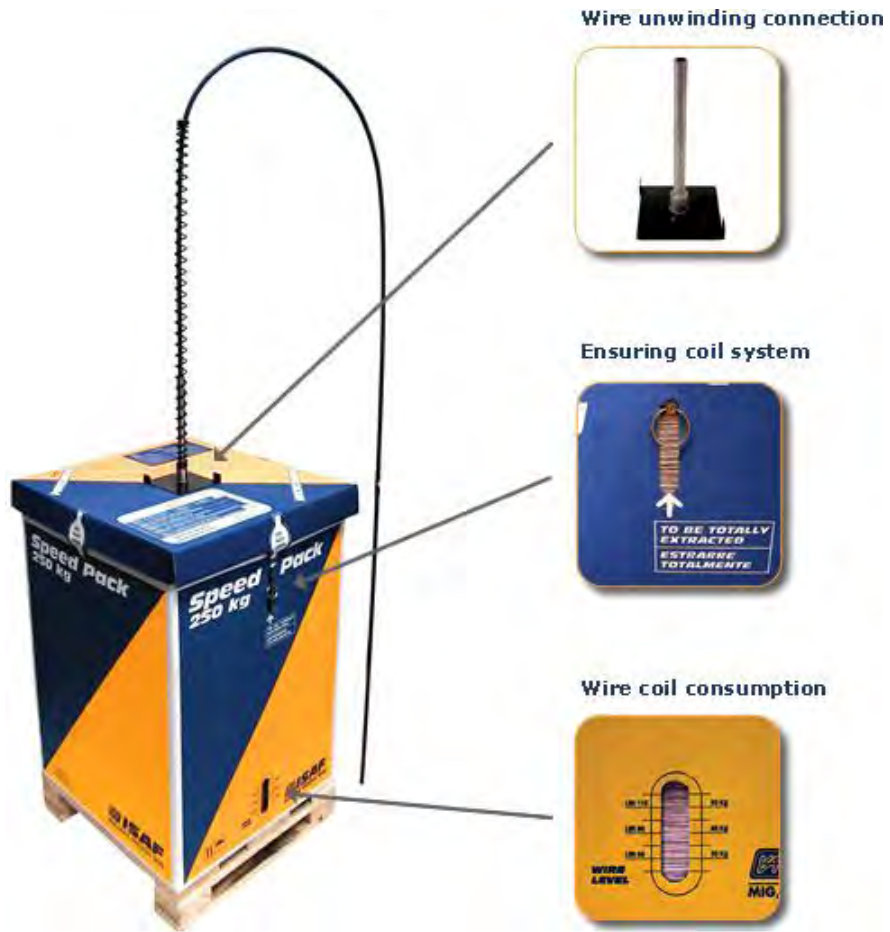



| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

Instructions

1. STRIP



2. TAKE OFF



3. STRIP



4. INSERT



5. TWIST





| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

Accessories

Complete Set



Wire unwinding connection



Flexible cable



Spring



Belt and spacer set





| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

Wires

Welding wire for automation welding process.

All wires of Isaf range may be supplied in Speed Pack packaging.



:: Trade name Isaf

- IS-5
- IS-10
- IS- 10S
- IS-C
- IS-D2
- IS-T
- IS-TS

:: Standards AWS

- AWS A5.18-93: ER 70 S-3
- AWS A5.18-93: ER 70 S-6
- AWS A5.28-96: ER 80 S-G
- AWS A5.28-96: ER 80 S-D2
- AWS A5.28-96: ER 100 S-G

:: Coats:

- Coating based on bronze
- Coppered
- Copper free





| [About it](#) | [Plus](#) | [Instructions](#) | [Accessories](#) | [Wires](#) | [Package](#)

Package

:: Dimensions Speed Pack
250 Kg / 550 lbs

A= 520 mm / 20"
B= 520 mm / 20"
C= 875 mm / 31"

Diameter of the wire

0,80 mm / .030"
0,90 mm / .035"
1,00 mm / .040"
1,20 mm / .045"



:: Speed Pack can be delivered in the 500 kg/1100 pounds version as well:

250 Kg / 550 lbs
450 Kg / 990 lbs
500 Kg / 1100 lbs
550 Kg / 1210 lbs

